



## LED Ceiling Light Apollo

- NEW: 22W dimmable version available
- NEW: bracket accessory for easy mounting on existing installations (no new screw holes needed)
- Easy installation on wall or ceiling
- LED Module Clio inside (12W and 16W)
- Uniform, diffused light, creating a pleasant atmosphere
- IP44 versions also suitable for bathrooms and comparable spaces
- Energy saving up to 80% in comparison to a traditional light source

IP44

IP20



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Energy Level	Weight (kg/pc)
520020000100	LED HC300 12W 2700K Apollo III	GLS 75W	12	1000	83	2700	A+	0.43

See appendix 1 for dimmer compatibility list

## Accessories



140060553  
LED Module sensor CT

520098000200  
LED Apollo HC300 bracket

## Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140060553	LED Module sensor CT	40x35x80	0.06	6945730491732	1
140060553	LED Module sensor CT	183x87x87	0.58	6945730441720	10
520020000100	LED HC300 12W 2700K Apollo III	336x95x336	0.93	6956321807184	1
520098000200	LED Apollo HC300 bracket	234x86x49	0.44	6956321815387	1

## Technical Specifications

Lifespan (L70B50)	30,000 h
Lifespan (L80B50)	20,000 h
On-/Off-cycles	100,000
Dimmable	No
Beam angle	120 °
Finishing	White RAL9003
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Protection class	I
Risk group	RG0
Control gear included	Yes

## Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V
	AC
DC input voltage	No

## Mechanical Properties

Material housing	Steel
Optical material	Polycarbonate


## Ambient Conditions

Operating temperature	-20 ~ 45 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C




## Dimensional Drawing (mm)


LED HC300 12W

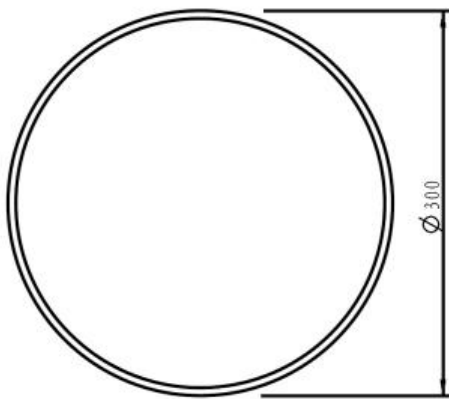

LED Apollo HC300 bracket



LED Module sensor CT

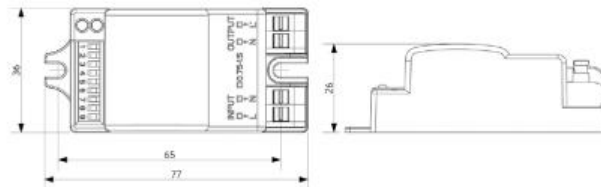

## Photometric Data