

LED Lima

- Stylish linear luminaire suitable for surface mounting and suspended use
- Suitable for use in office
- Available in 1200 & 1500mm length
- Suspension kit including transparent cable as accessory
- Connection kit accessory to create continuous lines available
- DALI or Smart Lighting (BLE) dimmable



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	UGR	CCT (K)	Weight (kg/pc)
542005004400	LEDLima L12-30W-4000-BLE	TL 1x54W	30	3450	115	≤ 22	4000	2.55

Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140063563	LEDSmartlight-Rc-Sensor	100x100x70	0.19	6956321862602	1
140063564	LEDSmartlight-Switch	89x21x101	0.09	6956321862619	1
506006003100	LEDSmart-Relay-500W	37x110x57	0.10	6956321820824	1
542005004400	LEDLima L12-30W-4000-BLE	1274x75x75	2.79	6956321820145	1
560000005700	Smart Connect Box	100x60x105	0.33	6941497711663	1
560000008400	LEDSmartlight-Rc-MW-Sensor	110x110x75	0.19	6941497726995	1
560098000600	LEDSmart-Sensor Surface-Module-WH	330x220x255	0.15	6941497703972	1

Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Dimmability	BLE
Beam angle	70 °
Finishing	Aluminum
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Impact strength	IK02
Protection class	I
Risk group (EN 62471)	RGO
With control gear	Yes
Glow wire test	650 °C
Driver failure rate (at 5,000 hrs)	1 %
Power factor	≥ 0.9

Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	See Appendix 4

Mechanical Properties

Material housing	Aluminium
Optical material	Polycarbonate


Ambient Conditions

Operating temperature	-10-+45 °C
Application temperature	+25 °C
Storage environment	-25-+50 °C



Dimensional Drawing (mm)

LEDLima L12

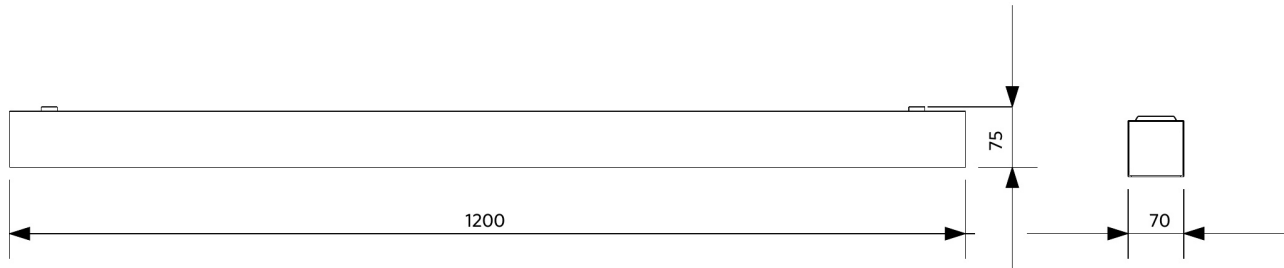

Photometric Data

