



## LED Slim Panel Basic

- Suitable for recessed applications
- Perfect replacement for conventional 4x18W luminaire
- Energy saving up to 55% possible
- Comfortable and uniform light available in UGR22 and UGR19
- Slim design, only 8mm thick
- Solid aluminum frame

UGR19

UGR22

30,000 h  
L70B50

## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	UGR	CCT (K)
140066707	LEDPanelRc-S-B Sq595-36W-4000-WH-U19	TL 4x18W	36	3240	90	19	4000
140067185	LEDPanelRc-S-B Sq595-36W-4000-WH	TL 4x18W	36	3240	90	22	4000

## Accessories



140055484  
LEDPanelRc-Sl Sq600-Surface-Module-WH-CT



140053150  
LEDPanelRc-Sl-E Mounting-Springs



140055365  
LEDPanel-Sl-E-Suspension-Kit

Mounting springs and suspension kit compatible with 140066707 only.

### Technical Specifications

On-/Off-cycles	100,000
Dimmable	No
Beam angle	85/120 °
Finishing	White RAL9003
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Protection class	II
Control gear included	Yes
Glow wire test	650 °C
Driver failure rate (at 5,000 hrs)	1 %
Weight (pc/kg)	2.20 / 2.48
Power factor	≥ 0.90

### Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V
Voltage type	AC

### Mechanical Properties


Material housing	Aluminium
Optical material	Plastic

### Ambient Conditions

Operating temperature	-10 - 45 °C
Application temperature	25 °C
Storage environment	-25 - 50 °C



# Dimensional Drawing (mm)

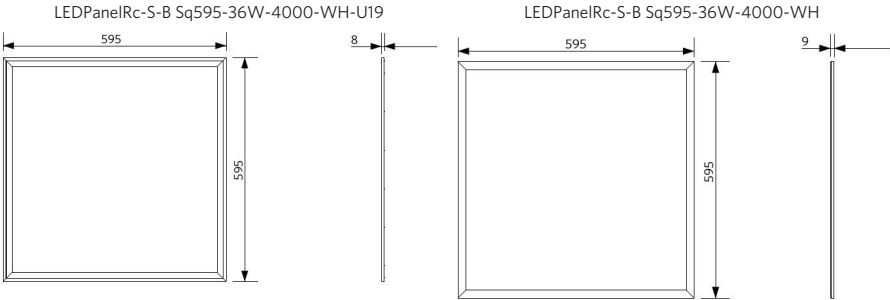

Check our website for more detailed product specifications.

