



Spot Performer 3C Compact

- High performance compact track spot with high luminous efficiency and homogeneous light distribution
- Various beam angles achievable with exchangeable reflectors
- Fitting common Global/Nordic Aluminum® 3C Tracks – and many other standard types
- Low glare due to matte black anti-glare ring




Specifications

| Item Code | Item Description | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Beam angle | Weight (kg/pc) |
|--------------|-------------------------------|-------------------|-----------|-------|-----------------|---------|------------|----------------|
| On-Off | | | | | | | | |
| 541001052600 | LEDSpot3C-C-P 35W-4000-36D-BL | HID 50W | 35 | 3150 | 90 | 4000 | 36° | 0.94 |

Accessories



550098000500
LEDSpot3C-C-P R100-Reflector-24D



599007082800
LEDSpot3C-C-P R100-Honeycomb

Packaging Information

| Item | | | Box | | | |
|--------------|----------------------------------|----------------|-------------------------|-------------------|---------------|--------|
| Item Code | Item Description | Commodity Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN | pc/box |
| 541001052600 | LEDSpot3C-C-P 35W-4000-36D-BL | 94051190 | 330x135x135 | 1.18 | 6941408813837 | 1 |
| 550098000500 | LEDSpot3C-C-P R100-Reflector-24D | 94059200 | 90x90x50 | 0.07 | 6941408820934 | 1 |
| 599007082800 | LEDSpot3C-C-P R100-Honeycomb | 94059200 | 96.5x96.5x12.8 | 0.21 | 6941408896724 | 1 |


| Technical Specifications | |
|------------------------------------|-------------|
| Lifetime (L70) | 70,000 h |
| Lifetime (L80) | 50,000 h |
| On-/Off-cycles | 100,000 |
| Colour consistency (SDCM) | 4 |
| Dimmability | On-Off |
| Maximum tilt angle | 85° |
| Finishing | Matte Black |
| Colour rendering index CRI | ≥ 90 |
| Degree of protection (IP) | IP20 |
| Impact strength | IK03 |
| Protection class | I |
| Risk group (EN 62471) | RG1 |
| With control gear | Yes |
| Glow wire test | 650°C |
| Driver failure rate (at 5,000 hrs) | 1 % |
| Power factor | ≥ 0.9 |

| Electrical Supply | |
|-------------------|--|
| Frequency | 50/60 Hz |
| Nominal voltage | 220-240 V AC |
| DC input voltage | See catalogue appendix Connection Specifications |

| Mechanical Properties | |
|-----------------------|----------------------|
| Housing material | Aluminium |
| Optical material | Coated Polycarbonate |
| Lens material | Polycarbonate |


| Ambient Conditions | |
|-------------------------|-----------|
| Operating temperature | -10-+40°C |
| Application temperature | +25°C |
| Storage environment | -25-+50°C |






OPPLE Lighting
541001052600

| | |
|---|---|
| A | ▶ |
| B | ▶ |
| C | ▶ |
| D | ▶ |
| E | ▶ |
| F | ▶ |
| G | ▶ |


F


35
kWh/1000h



2019/2015

Dimensional Drawing (mm)

LEDspot3C-C-P 35W

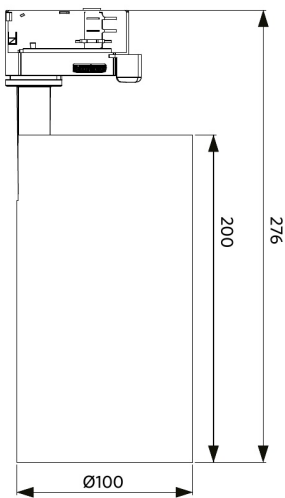

Photometric Data

