


## Low-Profile 70mm-75mm cut-out IP65 Fire Rated Downlight 6W (40W) 4000K 440lm 38 deg beam angle Dimmable

Partcode: ILDLFR70B003 / Page: 1

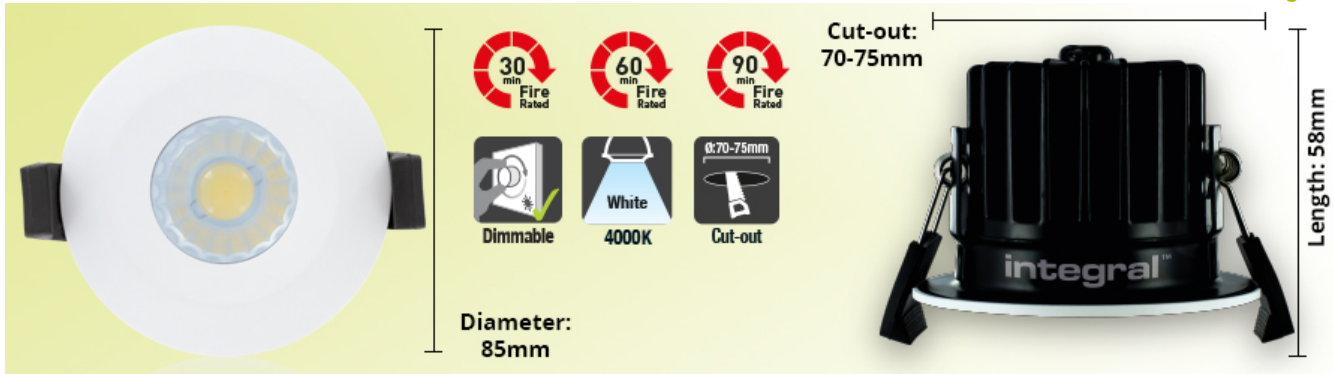

As LED products produced using new technologies are used with old dimmer technology, achieving effective and smooth dimming can be challenging. For this dimmable downlight we have tested, and recommend, the dimmer detailed in the specification below.

These low-profile lamps are fire rated to 30, 60 and 90 minutes, Air Tightness compliant with Part C and Part L and Resistance to Sound compliant with Part E. Warm White and Cool White colour temperature options and dimmable or non-dimmable options are available. Importantly, these lamps are IP65 rated and designed to offer the safety and quality of other Fire Rated Downlights but with a lower price-tag.

### Product Details

Partcode: ILDLFR70B003

Check Code: 391910

Range Name: Low-profile

Placement / Application: Indoor, General Lighting

Market Segment: Commercial indoor, Residential indoor

Product Type: Fire Rated

Warranty: 3 Years

CE / RoHS: Yes

### Physical Data

Product Finish: Matt white

Spot Type: COB

Optic: Clear Refractor

Material: Aluminium alloy, Iron, Intumescent material, Steel

Construction: Extruded Aluminium heat-sink, Iron body, Steel springs and mounting plate

**Physical Data**

Length: 58mm

Diameter: 85mm

Weight (Unpackaged Single Unit): 280g

Luminaire Fixing: Recess mounted

Fire Rating: 30, 60, 90

**Electrical Data**

Voltage Range: 220-240V

Power Consumption: 6.0 Watts

Driver included: Yes

Electric Current: AC

Ampage: 300.00mA

Frequency Range: 50/60 Hz

Power Factor:  $\geq 0.90$

Wattage Equivalent: 40 Watts

Dimming: Dimmable with compatible dimmers

Compatible Dimmer(s): Varilight JQP401W

LVD Certified: Yes

EN: EN-60598

**Light Data**

Lumens: 440lm

Lumens per Watt: 73.0lm/W

Beam Angle: 38°

Correlated Colour Temperature (CCT): 4,000k

Colour Temperature: Cool White

Colour Rendering Index (CRI):  $\geq 80$


LED Type: Chip on board (COB)

Instant on - Less than 1 second: Yes

Lifetime: 25,000 hrs

Switching Cycles:  $>12,500$  X

## Environmental

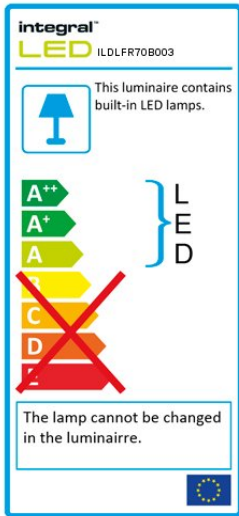

Lowest Operating Temperature: -20 degrees  
Maximum Operating Temperature: 45 degrees  
IP (Ingress Protection) Rating: IP65  
Hg 0% (Mercury Free): Yes

## Packaging

EAN Barcode (unit of 1): 5055788223405  
Packaged Weight (Unit of 1): 350g  
Length (unit of 1): 105mm  
Width (unit of 1): 100mm  
Depth (unit of 1): 80mm

**Outer packaging info available on website**

*Product data last updated on: Thursday, June 15, 2017 - 10:33*